



OMC-7012 Data-Buoy

The OMC-7012 data-buoy is specifically designed for the measurement of meteorological and hydrological parameters in lakes, rivers, estuaries and coastal zones. It is the bigger brother of the popular OMC-7006. Both buoys are intensively used for environmental monitoring. Many dredging companies use them for monitoring the impact of their dredging activities.

The OMC-7012 is bigger than the OMC-7006 and is able to support meteorological sensors as well as hydrological sensors. Also, the OMC-7012 can carry more weight, supply more power to the sensors, and can operate in rougher conditions than the OMC-7006.

The OMC-7012 is equipped with the OMC-045-III data logger, which has proven itself in the OMC-7006. This logger contains integrated GPS and GPRS, and can be interfaced to radio and satellite modems.

The electronics canister can be easily removed for maintenance, without taking the buoy out of the water. The same applies to the hydrological sensors, which can slide up and down a protective cage.

Features


- Integrated data logger with:
 - GPS and GPRS (data communication via the mobile phone network).
 - SMS alarm function on all parameters.
 - Event controlled logging interval.
 - Optional radio or satellite modems.
 - Easy to use configuration software.
- Solar powered, various panel and battery options.
- Programmable signal light.
- External Marine GPRS and GPS antennas.
- Supports a large range of hydrological sensors, including YSI and Analite turbidity sensors.
- Easy access to sensors and electronics without removing the buoy from the water.
- Seamless interface to our advanced OMC-DataOnline data management and presentation software.



OMC-7012 data buoy, typical configuration.



OMC-045-III data logger with GPS and GPRS.

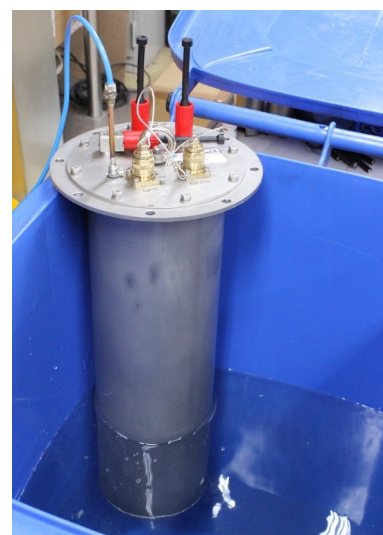

Pressure test of the canister with electronics and battery.

OMC-7012 Data-Buoy

Your benefit

The OMC-7012 is a well-proven and complete measurement station. The water quality and meteorological sensors are integrated by Observer on your specification. This allows for maximum flexibility in the parameters to be measured. The buoy itself, with the solar panels, the batteries, the logger with GPRS and GPS, the signal light and the antenna's, is a standard product with several options.

Optional

- Additional batteries. Standard 2 times 12 Volt, 12 Ah.
- Additional solar panels. Standard 2 times 20 Wp.
- Mooring set.
- Radio or Satellite communication module.
- Extended deployment tube. The standard tube ends above the ballast weights.
- Radar reflector.
- AIS transmitter.

More information


Contact Observer to specify your requirements and to get a quotation.

Separate data sheets are available from the Observer website:

- OMC-7006 data buoy
- OMC-045-III data logger
- OMC-DOL data processing and presentation SW
- Water quality sensors

Dimensions

- Diameter 120 cm.
- Height above water 170 cm, excluding meteo sensors.
- Total weight in air: 175 kg, excluding sensors.

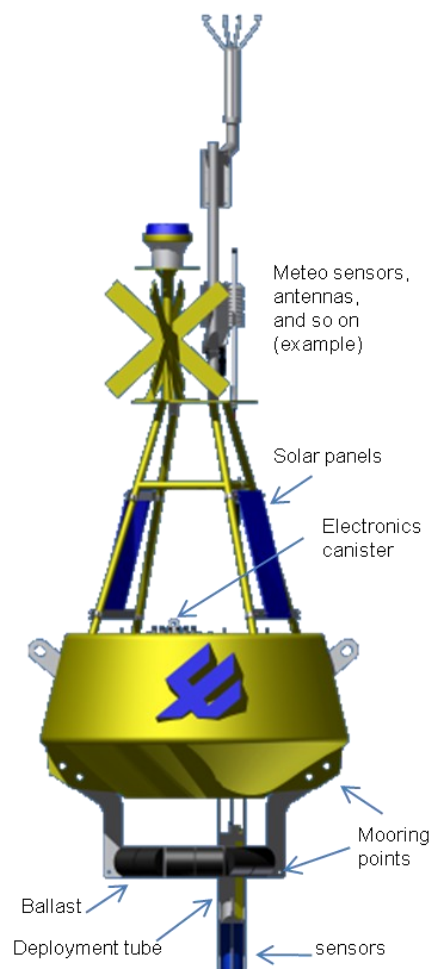

OMC-7012 main components



OMC-045-III data logger with optional Iridium satellite modem



Rietdekkerstraat 6
2984 BM Ridderkerk

P.O. Box 60
2980 AB Ridderkerk
The Netherlands

Phone +31 (0)180 463 411
Telefax +31 (0)180 463 530
E-mail info@observer.com
www.observer.com