

Key Features

- Precision 3-Axis Sonic Anemometer
- Horizontal Head for Minimal Flow Disturbance
- 0-45m/s wind speed
- 0-359° wind direction
- Stainless Steel Construction
- 100Hz Output Rate
- U, V, W Vector Outputs

The HS-100 3-axis anemometer features a horizontal head design, which allows for accurate measurement of vertical flows with minimum flow interruption from the anemometer geometry.

Ideal for scientific research applications, HS-100 is capable of monitoring wind speeds of 0-45m/s and offers a fast update rate of 100Hz for precision wind analysis.

The head of the anemometer features a built-in inclinometer to allow the instrument to be accurately positioned on a tower or mast. Access to the PRT and analogue inputs is provided via a separate electronic enclosure. The instrument is ideal for analysis of surface turbulence and can be positioned close to the ground or crop and tree canopies.



WIND SPEED

Range	0 - 45 m/s
Accuracy	<1% RMS
Resolution	0.01 m/s

DIRECTION

Range	0 - 359°
Accuracy*	<±1° RMS
Resolution	1°

ULTRASONIC MEASUREMENT

Ultrasonic sampling rate	100 Hz
Parameters	U, V, W, Speed of Sound

SPEED OF SOUND

Range and resolution	300 - 370m/s, 0.01/s
Accuracy	<±0.5% @20°C

DIGITAL OUTPUT

Communication	RS422 full duplex, 8 data bits, 1 stop bit, no parity
Baud rates	2400 - 115200
Output rate	Selectable 0.4 - 100 Hz

ANALOGUE INPUTS

Quantity	6 differential inputs
Sampling rate	100 Hz
Input range/resolution	±5V, 14 bits
Accuracy	<0.1% of FSR

*Accuracy specification applies for wind speed <32m/s and for wind incidence < ±50° in the horizontal plane and up to ±50° from the horizontal

ANALOGUE OUTPUTS (VIA SUPPLIED PCIA)

Quantity	7 (U, V, W, SoS, PRT+2 analogue outputs)
Scale	±10, ±20, ±30, ±60m/s
Update rate	0.4 to 100 Hz
Range and resolution	±2.5V, 14 bits
Accuracy	<0.25% of FSR

PRT INPUT (PRT100 NOT INCLUDED)

Input resolution	0.01°C
Input accuracy	<0.01°C (from 0°C to +50°C) <0.15°C (from -40°C to +60°C)

INCLINOMETER

Range/resolution	±20°, 0.01°
Null repeatability	±0.15°
Accuracy	±0.3° (from -10° to +10° of inclination)

POWER REQUIREMENT


Anemometer	9-30VDC (<150mA @ 24VDC or 300mA @ 12VDC)
------------	---

ENVIRONMENTAL

Operating temperature	-40°C to +60°C
Protection class	IP65
Precipitation	300mm/hr
EMC	EN 50081-1: 1992 (Emissions) EN 50082-1: 1992 (Immunity)
Suitable for exposure to a marine environment.	

Typical Applications

- Wind Turbulence Measurement
- Component Wind Velocity UVW
- Wind Profiling
- Remote Research facilities
- Off-shore installations
- Test Sites

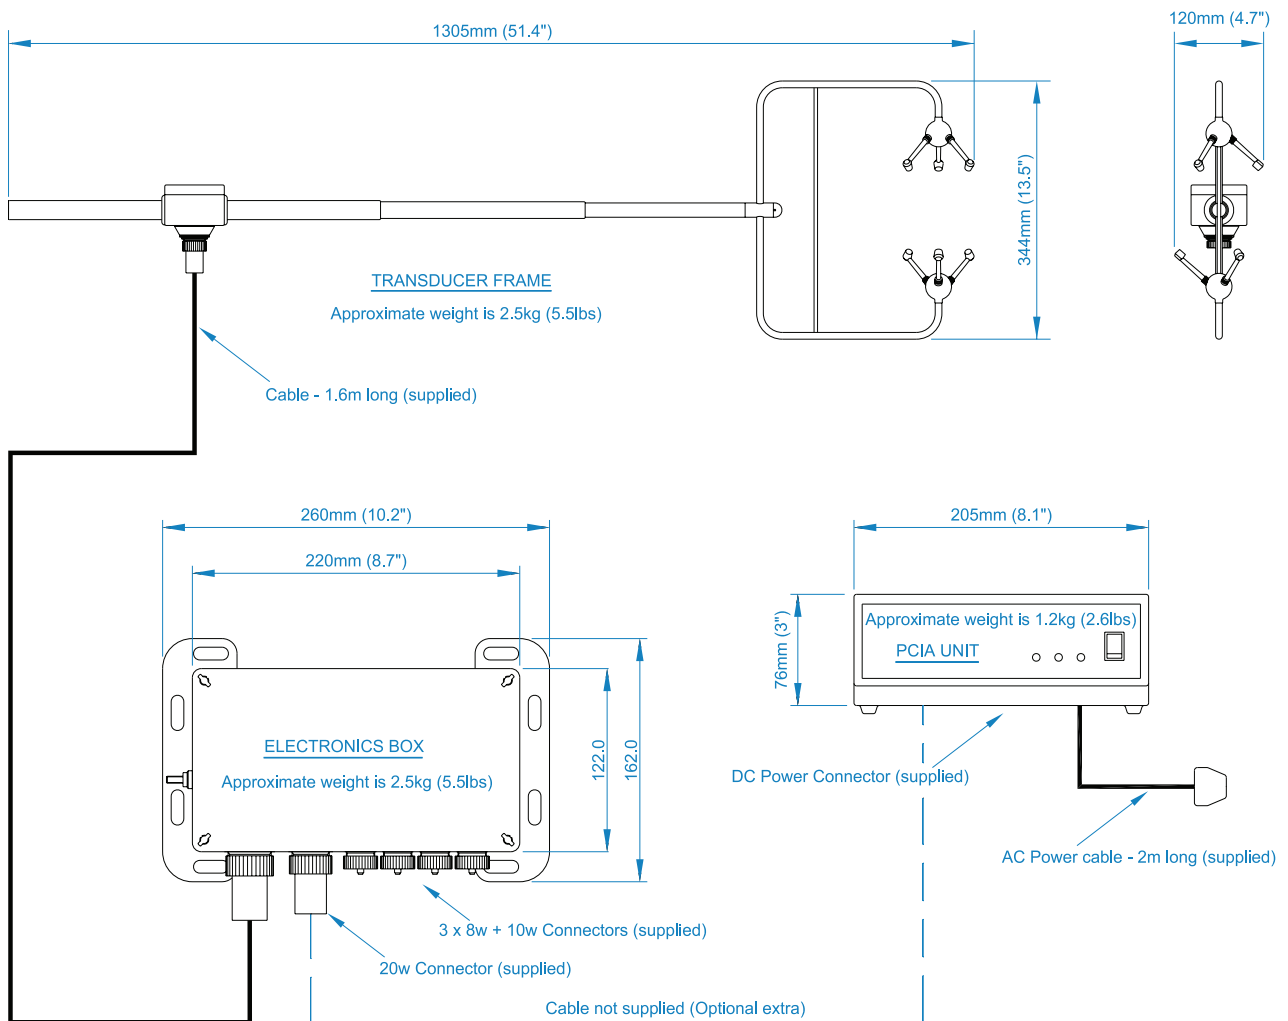

Specifications may be subject to change without prior notice.

GILL

Gill Instruments Limited

Saltmarsh Park, 67 Gosport Street
Lymington, Hampshire SO41 9EG
United Kingdom

Tel: +44 (0) 1590 613 500
Fax: +44 (0) 1590 613 501
contact@gillinstruments.com

gillinstruments.com

1199-0034 - Iss 2
Copyright © Gill Instruments 2019

Gill Instruments Ltd, Reg No. 2281574
Registered Office: Towngate House, 2-8 Parkstone Road, Poole. BH15 2PW

As a representative of this supplier, we – from Observator – distribute these products. Originating from the Netherlands, Observator has grown into an internationally oriented company with a worldwide distribution network.

For more information contact Observator Instruments:

Australia

T: +61 3 8706 5000

E: sales.au@observator.com / service.au@observator.com

Germany

T: +49 (0)152 02047306 / +49 (0)152 02047308

E: contact@observator.com

The Netherlands

T: +31 (0)180 463411

E: sales@observator.com / service@observator.com

Poland

T: +48 537 209 665

E: a.miller@observator.com

Singapore

T: +65 68 72 08 63

E: sales@observator.sg

United Kingdom

T: +44 (0)783 346 4884

E: info.uk@observator.com

Welcome to the world of Observator

Since 1924 Observator has evolved to be a trend-setting developer and supplier in a wide variety of industries. Originating from the Netherlands, Observator has grown into an internationally

oriented company with a worldwide distribution network and offices in Australia, Germany, the Netherlands, Singapore and the United Kingdom.

www.observator.com